



# I Display Specifications

Multiuser interactive LCDs for single display applications

MT420W7 MultiTaction Cell 42" Full HD LCD Embedded Windows 7

Display Specifications	MT420W7
Display Technology	TFT LCD
Display Size	42" 16:9 Wide
Native Resolution	Full HD 1920 x 1080
Display Colors	16.7 million
Display Active Area	930 x 523 mm
Pixel Pitch	0.48 x 0.48 mm
Pixel Response Time	8 ms grey to grey
Brightness	400 cd/m <sup>2</sup>
Contrast Ratio	3500 :1 typical
Picture Frame Rate	60 Hz
Backlight	White LED Matrix Array
Viewing Angle	178°

Touch Sensing Hardware	
Touch technology	Computer Vision Through Screen
Tracking Speed	Up to 200 fps
IR Source & cameras	Integrated Backlight Emitter Camera modules
IR Wavelength	850 nm

Touch Surface	
Display Safety Glass	Tempered 4 mm Optiwhite Glass covering whole front surface

Embedded Computer Specifications	
CPU	Intel Core i7 Quad Core
RAM	8 GB
Hard disk	128 GB SSD
Graphics	NVIDIA GTS450 1GB
Operating system	Windows 7 64-bit ENG

Interfaces	
Video Input	DVI-D, DisplayPort
Control Input	USB B, Ethernet
Auxiliary input for keyboard, mouse, and extra memory	3 x USB A
Audio out	RCA
Power Connector	IEC C14

Electrical Specifications	
Power Supply	100-240 VAC 50/60 Hz
Power Consumption	480 W

Touch Sensing Details	
Tracking Software	Embedded MultiTaction Extensible Hybrid Tracking Engine
Touch Input Types	Single finger, multiple fingers, single hand, multiple hands and users, objects with optical markers. Click, hold and drag.
Hand Recognition	Each finger identified to certain hand
Object Recognition	Supported with 2D fiducial markers
Number of Simultaneous Touch Inputs	Unlimited <sup>1)</sup>
Number of Simultaneous Users	Unlimited (separate hands) <sup>1)</sup>
Positional accuracy	2 mm, directional compensation
Relative accuracy	Sub-pixel accuracy
Touch Latency	10 ms typical <sup>2)</sup>
Tracking Data Outputs/APIs	Multi-Format Tracking Output: Low level C++, TUIO, XML stream, Windows 7 Touch
Operating System Support	Windows 7. (Linux, Mac OS X with external computer)
Development Environment Support	Most major programming languages and environments (e.g. MS Surface 2 SDK, Win 7 tools, TUIO-compatible systems) <sup>3)</sup>

Software Development Kit	Cornerstone SDK available for C++/OpenGL (Windows 7, Linux, Mac OS X)
Stackability	Up to 24 Cells can be connected to run a single Multi-touch application with external computer

Environment Specifications	
Operating Temperature	0 to +35 degrees C
Storage Temperature	-10 to +60 degrees C <sup>4)</sup>
Relative Humidity	Non-condensing 80%

Dimensions and Weight	
Physical Dimensions	965 x 557 x 200 mm
Bezel width	16 mm (bottom & sides), 17 mm (top)
Weight	32 kg (+5 kg for two legs)
Color	Black
Shipping Dimensions	tbd
Shipping Weight	tbd

Display Mounting	
VESA Mount	600 x 200 mm, M8 screws
Mounting positions	Vertical Horizontal Angled position Table position

Cooling	
Cooling system	Forced Air
Convection method	Low Noise Variable Speed Internal Fans
Noise Level	15 - 25 dBA

Miscellaneous	
Agency Approvals	CE
RoHS Compliant	Yes
Expected Life-time	Over 60,000 h
Warranty	1 Year

Sales Package Contents	
Display Unit	1
Power Cords	5 m, EUR, US, GB
Digital Video Cable	DVI-D 5 m
USB A-B Cable	5 m
Cat5e Ethernet Cable	5 m
Display stand	Table stand for landscape/portrait use
Protective/autocalibration sheet	1
Mounting rail bits	4 pcs
Warranty Card	
Quick Start Guide	
Product Manual	English version

- 1) Practically limited by how many people can fit next to display array.
- 2) Measured from touch to processed tracking data output. Overall latency is more and depends on the computer, operating system and application used.
- 3) See Cornerstone data sheet for more details.
- 4) Allow at least two hours for temperature normalization before switching on

Specifications subject to change without notice.




# I Dimensions

## MT420W7

### MT420W7 Dimensions

All dimensions in millimeters

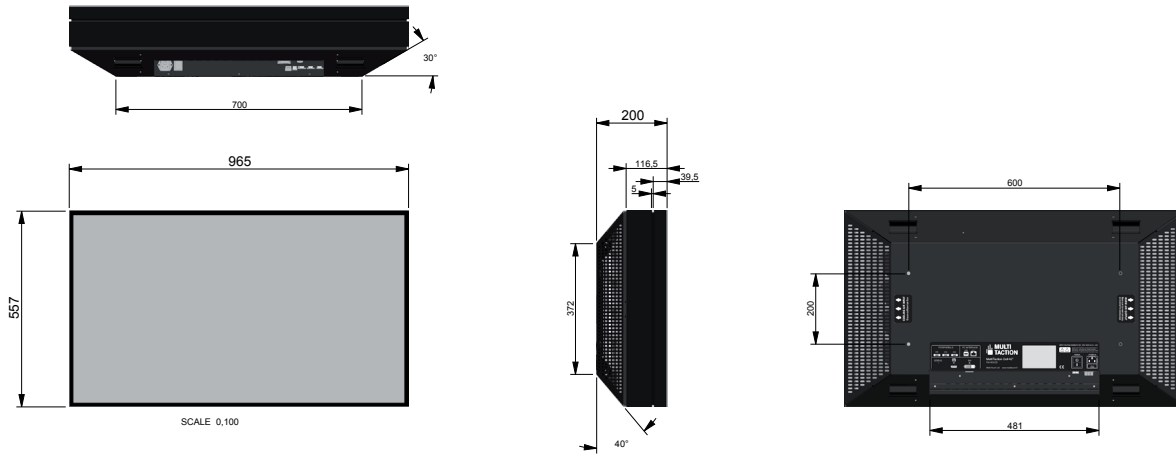

Single display unit 42" – frontal view



Single display unit 42" – side view



Display is available both in 42" and 55" sizes.

#### Official MultiTaction® Cell video:

<http://www.youtube.com/multitouchfi#p/a/u/0/7ve44jMGrvk>

#### MultiTaction® Cell Technology video:

<http://www.youtube.com/multitouchfi#p/a/u/1/klwpc1PDQWY>

## /// For commercial enquiries, please contact:

MultiTouch Ltd:  
Email: [sales@multitouch.fi](mailto:sales@multitouch.fi)  
Phone: +358 45 630 8580

MultiTouch Americas:  
Email: [sales-us@multitouch.ch](mailto:sales-us@multitouch.ch)  
Phone: (888) 716 8584

MultiTouch Asia  
Email: [sales-asia@multitouch.ch](mailto:sales-asia@multitouch.ch)  
Phone: +65 6632 3578

Official MultiTouch Resellers  
in your area:  
[www.multitouch.fi/partners](http://www.multitouch.fi/partners)